


CD-5020A

CD Loader Unit for Audio Products

- Smooth tray loading and eject.
- Low clamp noise.
- PCBA is able to install in the drive bottom.
- Two kinds of emergency eject mechanisms.
- Control I/F : UART
- Digital Audio I/F : I2S and SPDIF
- Adopt shock proof (Buffer memory) *option
- Only 5V is required to supply power.

Read Speed	1~2 x
MP3/WMA/AAC Decode	Support
Shock Proof (Buffer RAM)	Option
Control Interface	UART (RTS/CTS)
Audio Interface	I2S / SPDIF
Disc Diameter	12cm , 8cm
Environmental Condition	
Ambient Temperature	Operating 5~45°C Non operating -20~60°C Transportation -40~60°C
Relative Humidity	Operating 20~80% (non-condensing)
Power Requirements	DC 5V ± 5%
Loading / Ejecting Life	10,000 times or more
Loading Mechanism	Tray Loading
Dimensions	
Tray Open	138W x 62H x 309D (mm)
Tray Close	138W x 55H x 179.5D (mm)
Mass (Weight)	390g or less
Mounting Orientation	Horizontal
RoHS Directive	Complied

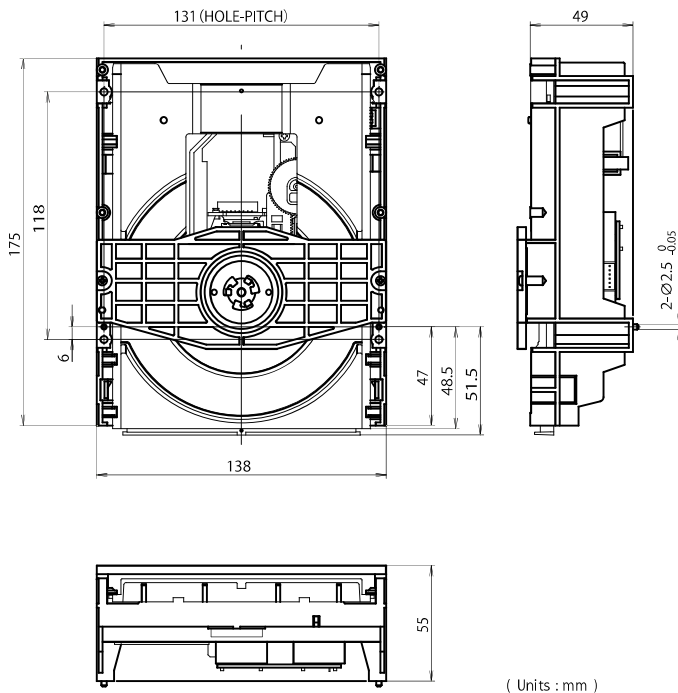

Company names and product names in this document are the trademarks or registered trademarks of their respective owners. Features and specifications are subject to change without notice. Precaution : To ensure safe handling and operation, read the Instruction Manual before use.



株式会社アルメディア ストレージソリューション事業部
 〒191-0065 東京都日野市旭が丘3-1-4 電話 042-511-0481 FAX 042-511-0482
<http://www.almedio.co.jp>

ALMEDIO INC. Storage Solution Division
 3-1-4, Asahigaoka, Hino-shi, Tokyo, 191-0065, Japan Phone +81-42-511-0481 Fax +81-42-511-0482
<http://www.almedio.co.jp>