TEAC®

NEW
Product Information

Slot Loading

DV-W28SS-B

Slot-Loading DVD Super Multi Drive

8x DVD±R **4x DVD±RW**
6x DVD±R DL **24x CD-R**

- Slim type Slot Loading design
- Zero Power ODD Support
- Supporting disc-at-once, session-at-once, packet write, incremental, over write, track-at-once recording mode, sequential write, multi-session and back ground format
- Horizontal and vertical mounting for most system configuration
- One Push Emergency Eject Function

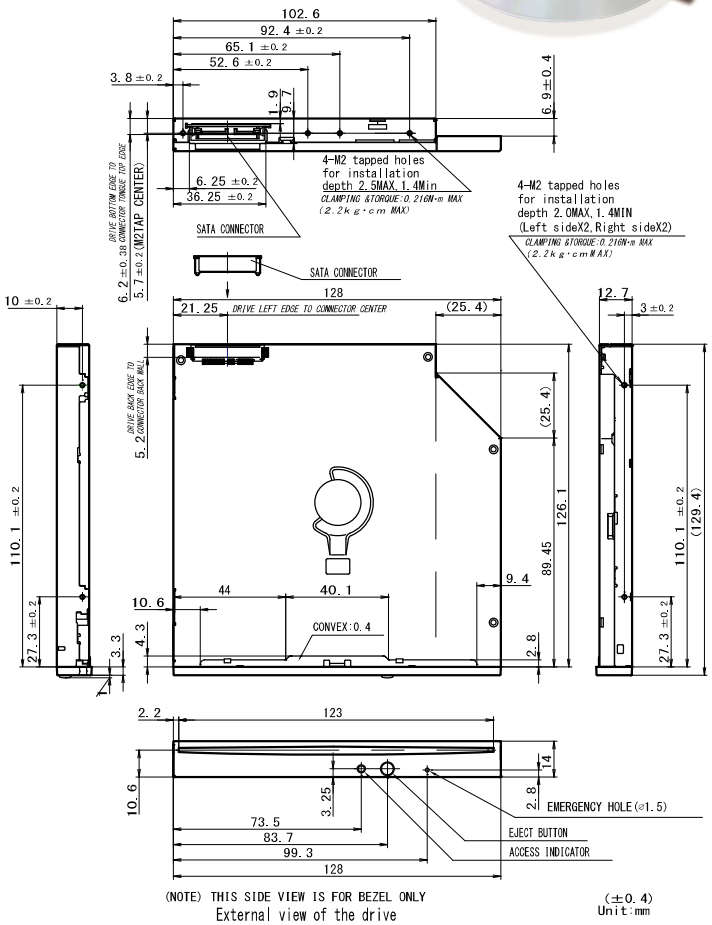

Write Speed (Max Speed)	DVD+R		8x (CAV)
	DVD+R DL		6x (ZCLV)
	DVD-R		8x (CAV)
	DVD-R DL		6x (ZCLV)
	DVD+RW		4x (ZCLV)
	DVD-RW		4x (ZCLV)
	DVD-RAM		3x (CLV)
	CD-R		24x (CAV)
	CD-RW	HS	10x (ZCLV)
		MS	4x (CLV)
Read Speed (Max Speed)	DVD-ROM		8x (CAV)
	DVD±R		8x (CAV)
	DVD +R DL (Finalized Disc)		8x (CAV)
	DV D -R DL (Finalized Disc)		8x (CAV)
	DVD±RW		8x (CAV)
	DVD-RAM (4.7G)		5x (ZCLV)
	CD-ROM		24x (CAV)
	CD-R / RW		24x (CAV)
Disc Diameter	12cm		
Interface	SerialATA Revision3.1		
Data Transfer Rate	Gen1 1.5GB / sec		
Access Time	150ms (typ) DVD-ROM		
	140ms (typ) CD-ROM		
Data Bu?er	512KB		
Loading Mechanism	Slot Loading Type		
Environmental Conditions			
Ambient Temperatures	Operating		5 to 45℃
	Non Operating		-20 to 60℃
	Transportation		-40 to 65℃
Ambient Humidity	Operating		8 to 80% (non-condensing) *
	Non Operating		5 to 95% (non-condensing) *
	Transportation		5 to 95% (non-condensing) *
Power Requirements	DC5V±5%		
Current Consumption	Standby / Sleep 70mA / 70mA (Average current max)		
	During starting /Seek 1500mA (Max. Spikes less 1ms)		
MTBF	60,000POH (10% duty)		
Safty / EMI Standards	UL, CUL, TÜV, CB, CE and BSMI		
Dimensions	128.0W x 12.7H x 129.4D (mm)		
Mass (Weight)	160g or less (Bezel Less)		
RoHS	Complied		

Remark
Please check the specification sheets for detailed conditions and other information.
* The maximum wet-bulb temp. is 29.4 degree C

DVD is a trademark of DVD Format/Logo Licensing Corporation registered in the U.S., Japan and other countries.

RW DVD+R DL and COMPACT disc ReWritable High Speed are trademarks of Koninklijke Philips Electronics N.V.

Other company names and product names in this document are the trademarks or registered trademarks of their respective owners.Features and specifications are subject to change without notice. Precaution : To ensure safe handling and operation, read the Instruction Manual before use.

ALMEDIO

株式会社アルメディオ ストレージソリューション事業部
〒191-0065 東京都日野市旭が丘3-1-4 電話 042-511-0481 FAX 042-511-0482
http://www.almedio.co.jp

ALMEDIO INC. Storage Solution Division
3-1-4, Asahigaoka, Hino-shi, Tokyo, 191-0065, Japan Phone +81-42-511-0481 Fax +81-42-511-0482
http://www.almedio.co.jp

このカタログの記載内容は2017年2月現在のものです。
The contents presented in this catalog were updated as February 2017.

PRINTED IN JAPAN.