

RADIAL RUN-OUT TEST BD-R/-RE

For Checking BD Players, BD Recorders and BD Drives ABD-R520E/-RE520E Series

1. Purpose of use, Features

These are Radial Run-Out Test Discs designed for confirmation of tracking servo ability and evaluation, measurement and adjustment of BD Players, Recorders and Drives.


2. Specifications

 ABD-R520W/ -RE520W are used as a material disc. Please refer to ABD-R520W/ -RE520W Product Introduction for basic parameters.

BD-R	BD-RE	Eccentricity μm 💥	Description
ABD-R520E1	ABD-RE520E1	≦ 10	
ABD-R520E2	ABD-RE520E2	37.5 ±5	For testing the maximum value specified in BD Specifications.
ABD-R520E3	ABD-RE520E3	75 ±5	
ABD-R520E4	ABD-RE520E4	100 ±5	
ABD-R520E5	ABD-RE520E5	150 ±5	

 \divideontimes) We define Eccentricity here is the distance from the center of the center hole to the center of the track circle that the most inner pit of the disc plots. Therefore, the Eccentricity of this table is indicated as 0-p. (It is specified the radial run-out of the tracks including eccentricity and unroundness shall be 75 μ m p-p ma in the BD-R/-RE Specifications.)

note) Please be careful not to erase the content from, nor overwrite ABD-RE520E Series.

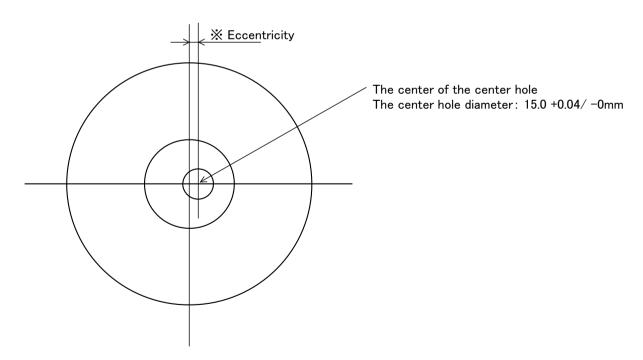

Imaged figure of Eccentricity

Values in this sheet are measured by the equipments ALMEDIO-owned. Appearance and specifications are subject to change without notice.

<Proper handling of the disc>

Do not write on the surface with a pen and others, nor put a sticker on it.

Do not expose the disc to direct sunlight, nor leave it in the place of high temperature and high humidity. After playing, store the disc in its own case.

ALMEDIO INC.
Sales Headquarters
http://www.almedio.co.jp
E-Mail: tm-sales@almedio.co.jp