

RADIAL RUNOUT TEST DVD+R

For Checking DVD Players, DVD Recorders and DVD Drives TDV-PR540CD Eccentricity Series

1. Purpose of use, Features

These are Radial Run-Out Test Discs designed for confirmation of tracking servo ability and evaluation, measurement and adjustment of DVD Players, Recorders and Drives.


2. Specifications

- TDV-PR540CD is used as a material disc. Please refer to TDV-PR540CD Product Introduction for basic parameters.

Model Name	Eccentricity μm ※
TDV-PR550CD	≤ 10
TDV-PR551CD	50 ± 5
TDV-PR552CD	100 ± 5
TDV-PR553CD	150 ± 5

note1) We define Eccentricity here is the distance from the center of the center hole to the center of the track circle that the most inner pit of the disc plots. Therefore, the Eccentricity of this table is indicated as 0-p (It is specified the radial run-out of the tracks shall be 100 μm p-p max. in the DVD Specifications.)

note2) Eccentricity is specified at Layer 0.

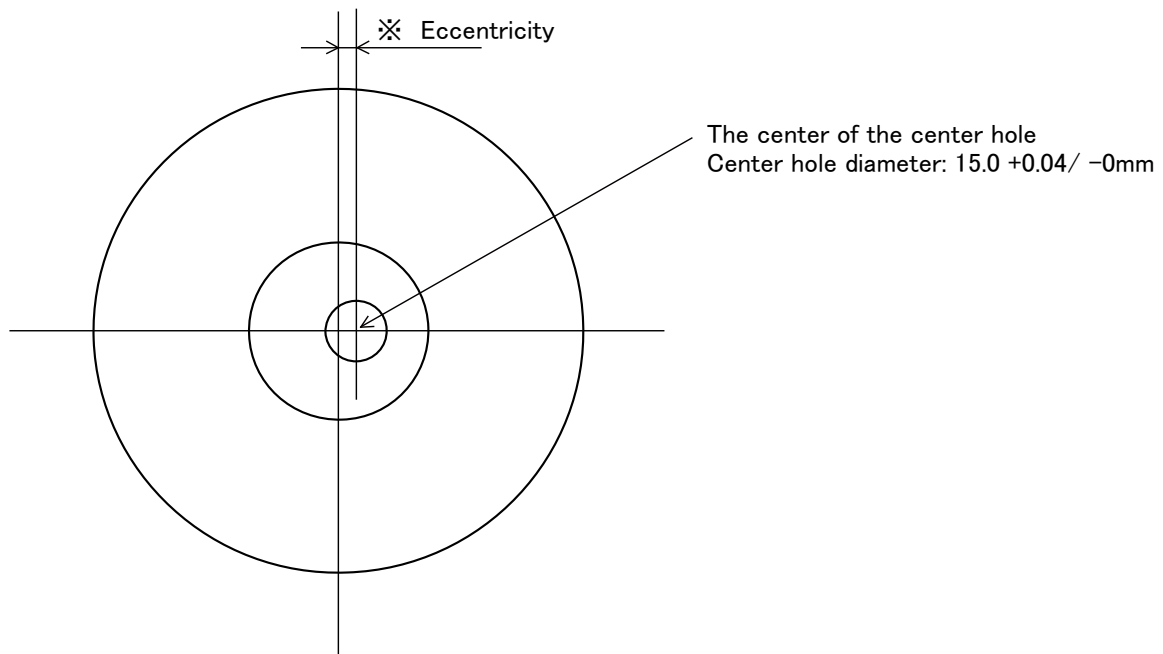

Imaged figure of Eccentricity

Values in this sheet are measured by the equipments ALMEDIO-owned. Appearance and specifications are subject to change without notice.

<Proper handling of the disc>
Do not write on the surface with a pen and others, nor put a sticker on it.
Do not expose the disc to direct sunlight, nor leave it in the place of high temperature and high humidity.
After playing, store the disc in its own case.

ALMEDIO INC.
Sales Headquarters
<http://www.almedio.co.jp>
E-Mail : tm-sales@almedio.co.jp