

RADIAL RUN-OUT LOW REFLECTIVITY TEST DVD-R/ -RW

For Checking DVD Players, DVD Recorders and DVD Drives

TDV-R520CL/ -MW520CL Eccentricity Series

1. Purpose of use, Features

These are Radial Run-out Test Discs using low reflection DVD-R/ -RW.

It is designed for confirmation of tracking servo ability and evaluation, measurement and adjustment of DVD Players, Recorders and Drives.


2. Specifications

- TDV-R520CL, TDV-MW520CL are used as a material disc. Please refer to TDV-R520CL, TDV-MW520CL Product Introduction for basic parameters.

DVD-R	DVD-RW	Eccentricity μm ※
TDV-R510CL	TDV-MW510CL	≤ 10
TDV-R511CL	TDV-MW511CL	50 ± 5
TDV-R512CL	TDV-MW512CL	100 ± 5
TDV-R513CL	TDV-MW513CL	150 ± 5

note1) We define Eccentricity here is the distance from the center of the center hole to the center of the track circle that the most inner pit of the disc plots. Therefore, the Eccentricity of this table is indicated as 0-p.

note2) Please be careful not to erase the content from, nor overwrite TDV-MW520CL E-series.

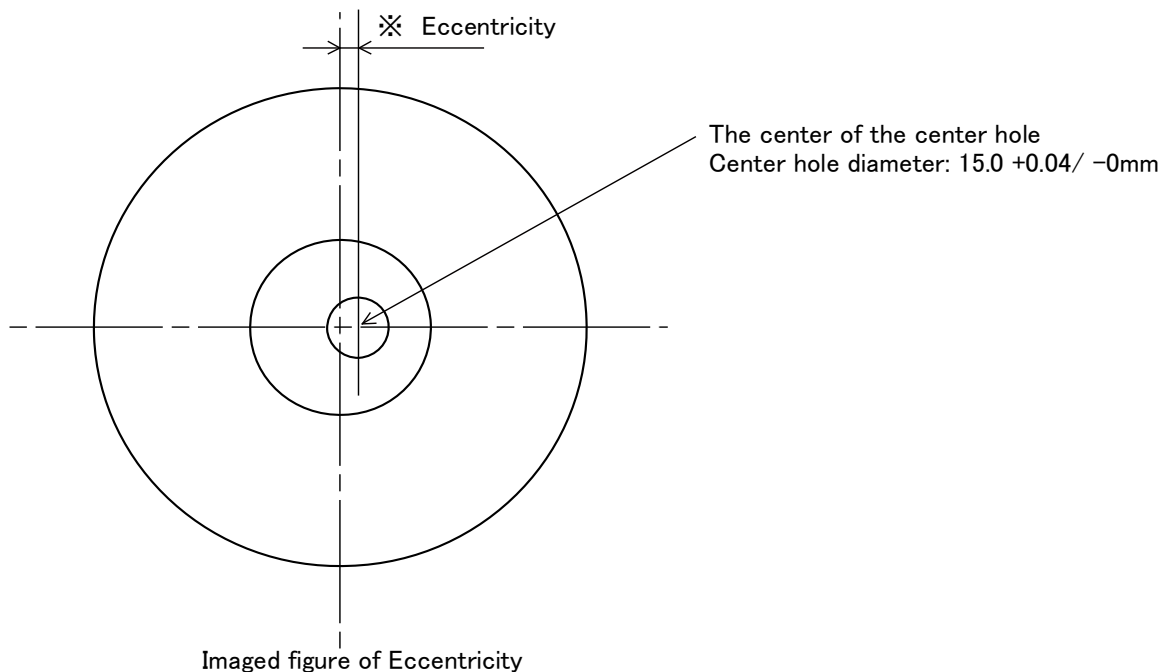

Values in this sheet are measured by the equipments ALMEDIO-owned. Appearance and specifications are subject to change without notice.

<Proper handling of the disc>
 Do not write on the surface with a pen and others, nor put a sticker on it.
 Do not expose the disc to direct sunlight, nor leave it in the place of high temperature and high humidity.
 After playing, store the disc in its own case.

ALMEDIO INC.
 Sales Headquarters
 Sakae, 2-32-13, Higashimurayama, Tokyo, Japan
 TEL : +81-(0)42-397-1331 FAX : +81-(0)42-397-1919
<http://www.almedio.co.jp/english/index.phtml>
 E-Mail : tm-sales@almedio.co.jp